



REAL-TIME SOLUTIONS



TRANSPORT ROUTES CAN BE VIEWED



BEST GLOBAL COVERAGE



24 HOURS ONLINE MONITORING OF CARGO

Plustrace G6B is a one-time real-time monitoring device, that can help you monitor during transportation Temperature, humidity, light, shock and location.

The product can work in the temperature range of -30°C to 70°C, suitable for road transport, sea and air transport.

PLUSTRACE is a versatile and low-cost real-time visualization tool for cold chain transportation and warehousing, combined with an alert mechanism to ensure timely corrective action and automatic data analysis for perfect process improvement.


Temperature, humidity, light, vibration and position information can be monitored and reported in real time via PC/ mobile.

Prevention and management of risks in transit.

Send real-time alerts via email, SMS, apps. The PDF report can be downloaded via USB port and cloud platform

Large storage capacity, keeping records and storage in offline mode. After the signal is returned, the data is retransmitted. Zero data loss

It can support remote parameter setting and alarm threshold modification.

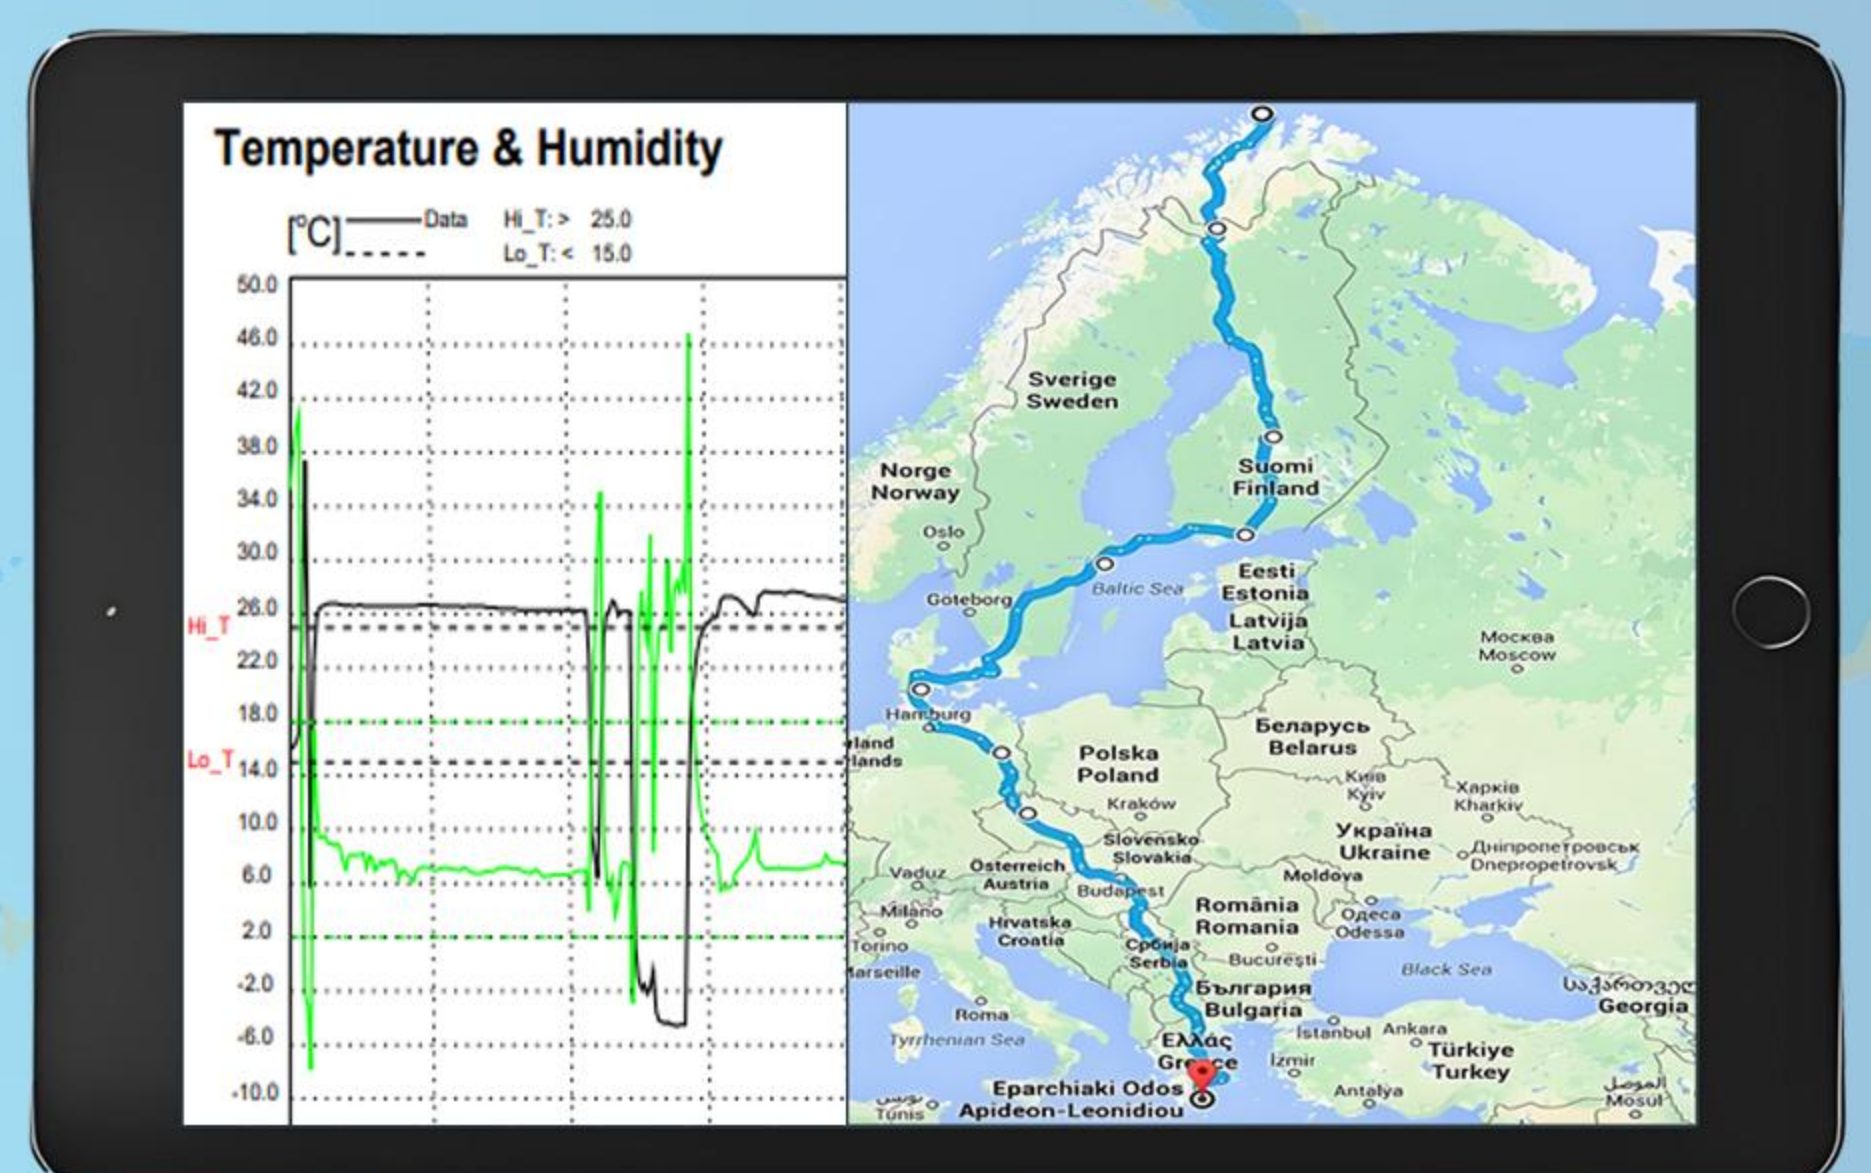



- ☁ Real-time temperature alarm
- ☁ Real-time humidity, light, shock and location
- ☁ Arrival notification
- ☁ Vibration monitoring
- ☁ Dynamic playback of the whole trajectory
- ☁ Long-term data storage
- ☁ Data analysis report
- ☁ Available on mobile/PC
- ☁ Comply with GSP

**SPECIFICATIONS**

**G6B**

**2G(60/120)**

<b>Data logger type</b>	Single-use (60/120 days)
<b>Monitor Information</b>	Temperature, Humidity, Light, Shock, Location, Track routes
<b>Temperature Sensor</b>	Internal Temperature Sensor (NIST Traceable)
<b>Temperature Range</b>	-30°C to 70°C (-22°F to 158°F)
<b>Temperature Accuracy</b>	±0.5°C (-20°C to +40°C); ±1°C (other range)
<b>Humidity Range</b>	5%-95%RH
<b>Humidity Accuracy</b>	±3%(20% to 80%RH); ±5% (other range)
<b>Resolution(Temp/Humidity)</b>	0.1°C / 1%RH
<b>Light Sensor Range</b>	0~52,000 Lux, detect whether doors or cartons open
<b>Memory Capacity</b>	Max 28800 readings
<b>Location Type</b>	LBS Base Station Positioning
<b>Cellular</b>	2G Network
<b>SIM Card</b>	Internal Embedded (Global Data Roaming)
<b>Shelf Time</b>	12 Months
<b>Use Time</b>	60/120 Days use time with 120 Min reporting interval
<b>Data Logging Interval</b>	10 Min. (settable via platform)
<b>Data Reporting Interval</b>	10 Min. (10/20/30/60 Min settable via platform)
<b>Environmental Rating</b>	IP64
<b>Cold Chain PDF Report</b>	Get PDF report via USB2.0/cloud platform/Mobile App
<b>Dimensions/Weight</b>	110 X 60 X 40 mm / 140 g
<b>Certifications</b>	FCC, CE, RTCA/DO-160G, UN38.3, ROHS, WEEE
<b>Storage temperature range</b>	-10°C to +55°C

**You are welcome to contact us**

**Plustrace Technology co.,Ltd**  
**E-mail: info@plustrace.com**  
**Address: Building 2, LGXC, Jinshui Rd, Zhengzhou, 450018, PR China**

**Cel: +86 18613716048**  
**Phone: +86 371 61317899**